



WWW.BARRYIND.COM

AA0175-250-17X






Aluminum Nitride 1.75 dB FLANGED ATTENUATOR

Features:

- ◆ Aluminum Nitride Material
- ◆ DC - 3 GHz Performance
- ◆ 250 Watt Input Power
- ◆ Flange Mount

General Description:


The AA0175-250-17X is a 1.75 dB flanged Aluminum Nitride attenuator. It has an input power rating of 250 watts, while maintaining a constant flange temperature of 100°C. It offers a frequency range from DC to 3 GHz.

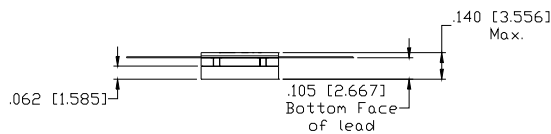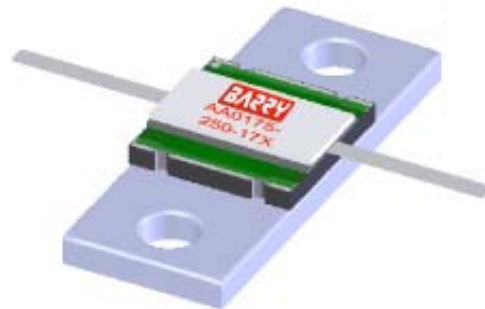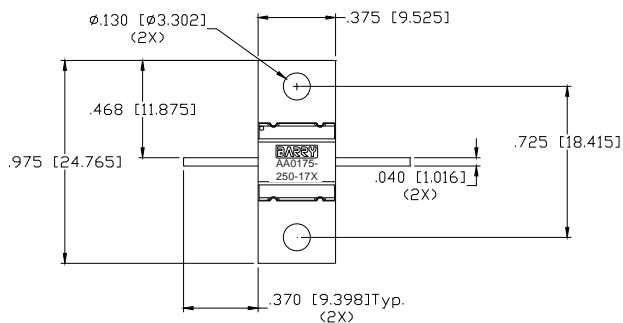

Dimensions in inches [mm]
Tolerance $\pm .010$ [.254]
unless otherwise stated

UNIT MAY BE MOUNTED
IN EITHER DIRECTION

DERATING CURVE:



Parameter	Min.	Typ.	Max.	Units
Frequency Range	DC		3	GHz
Input Power			250	Watts
Input Return Loss	17			dB
Output Return Loss	17			dB
Flange Temperature			100 150 (0% Power)	°C
Attenuation	1.5	1.75	2.0	dB

Barry Industries reserves the right to change part number and or process without notification.

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com

Barry Industries maintains an ISO 9001 Certified Quality Management System

Origination Date	Revision Date	Rev.
03/20/12	03/20/12	-