
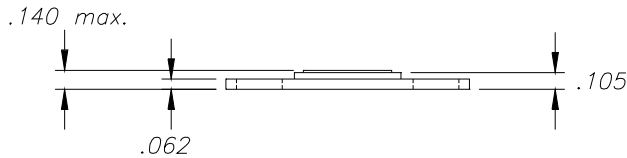
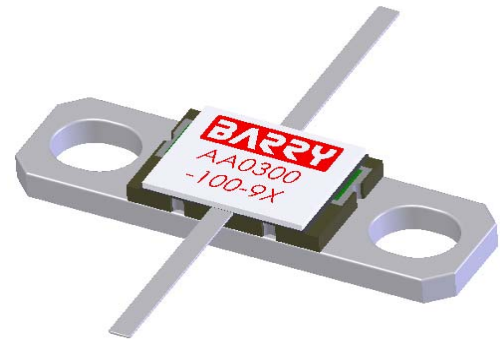


## Aluminum Nitride 3 dB FLANGED ATTENUATOR


### Features:

- ◆ AIN material
- ◆ 100 Watt Input power
- ◆ Flange mount

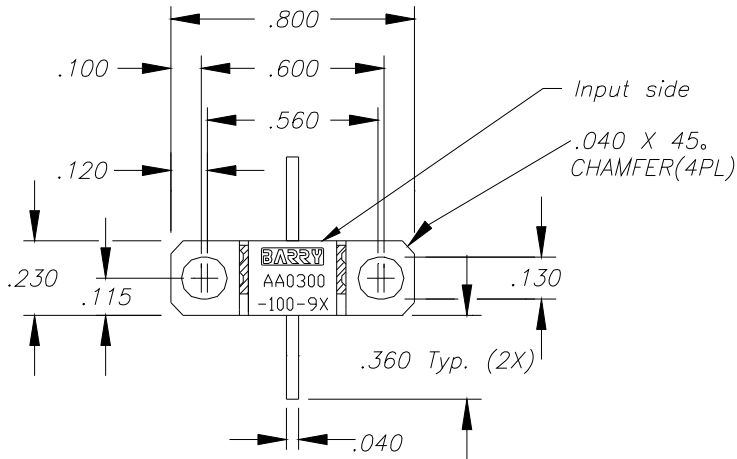

Dimensions in inches  
Tolerance ± .010  
unless otherwise stated

DERATING CURVE:



Parameter	Min.	Typ.	Max.	Units
Frequency Range	DC		2	GHz
Input Return Loss	20			dB
Output Return Loss	20			dB
Attenuation	2.7	3	3.7	dB
Input Power			100	WATTS
Flange Temperature			100	°C

\* Barry Industries reserves the right to change part number and or process without notification

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com  
Barry Industries maintains an ISO 9001 Certified Quality Management System

Origination Date	Revision Date	Rev.
09/17/08	09/29/08	A