



WWW.BARRYIND.COM

AA0300-20-3X




Aluminum Nitride 3 dB FLANGED ATTENUATOR

Features:


- ◆ AIN Material
- ◆ DC - 4 GHz Performance
- ◆ 20 Watt Input Power
- ◆ Flange Mount

General Description:


The AA0300-20-3X is a flanged 3dB, Aluminum Nitride attenuator. It has an input power of 20 watts, while maintaining a constant flange temperature of 100°C. It offers a frequency range from DC to 4 GHz.

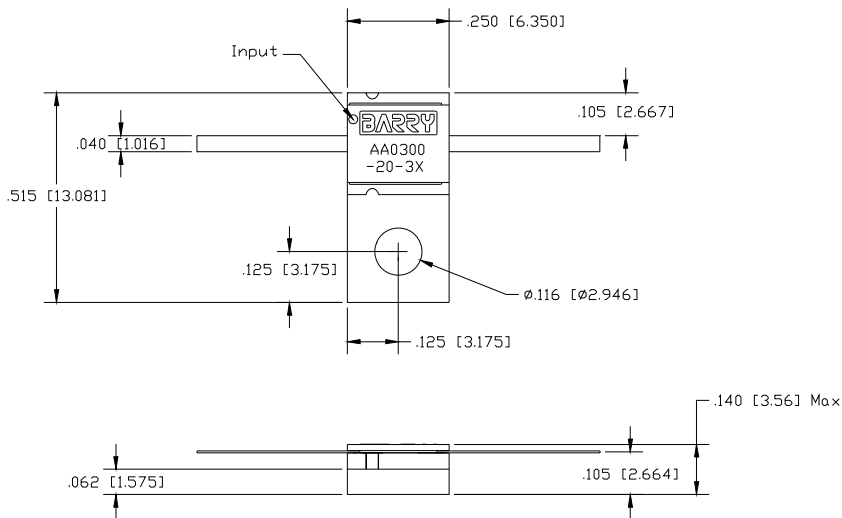

Dimensions in inches [mm]
Tolerance ± .010 [.254]
unless otherwise stated

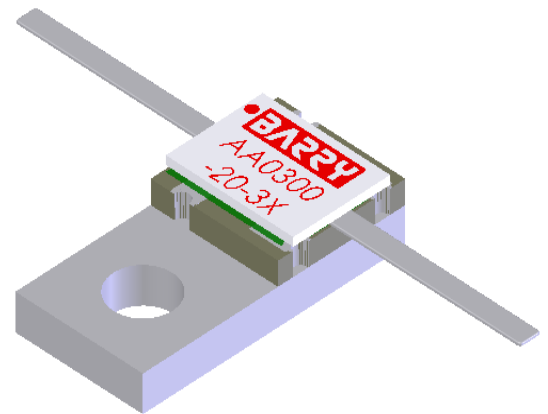

DERATING CURVE:



Parameter	Min.	Typ.	Max.	Units
Frequency Range	DC		4	GHz
Input Return Loss	18			dB
Output Return Loss	19			dB
Input Power			20	Watts
Flange Temperature			100	°C
Attenuation Flatness	2	3	4	dB

Barry Industries reserves the right to change part number and or process without notification.

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com

Barry Industries maintains an ISO 9001 Certified Quality Management System

Origination Date	Revision Date	Rev.
12/23/08	12/23/08	-