


A0100-2000-1X Features:


- Flange Mount
- RoHS Compliant
- Customer Defined Testing Available
- High Rated Power
- Covered Resistive Element
- Symmetrical Design¹

A0100-2000-1X Parameters:


| | | |
|-------------------------|----------------------------|-------------------------------|
| Nominal Attenuation: | 1dB | |
| Operating Frequency: | DC - 2GHz | |
| Attenuation Tolerance: | ±0.2dB (DC - 1GHz) | ±0.35dB (>1GHz - 2GHz) |
| Return Loss (Typical)*: | 25dB or Better (DC - 1GHz) | 20dB or Better (>1GHz - 2GHz) |
| Input Power: | 2000W** | |
| Impedance: | 50Ω | |
| Resistor Construction: | Thick Film on BeO | |
| Flange Construction: | Silver Plated Copper | |
| Lead Construction: | Silver Plated Copper | |
| Operating Temperature: | -55 to +150°C | |

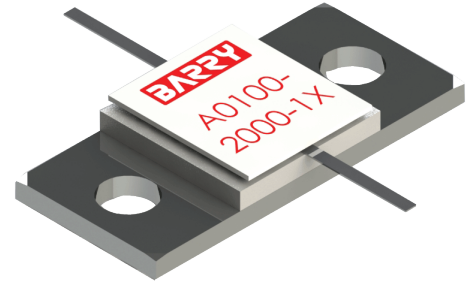

A0100-2000-1X Dimensions:

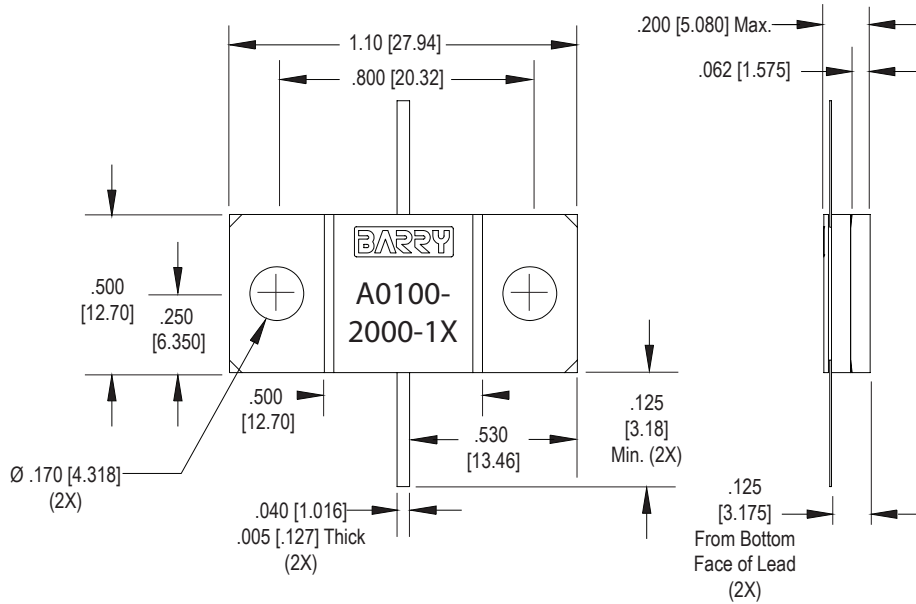


A0100-2000-1X Power Derating Curve

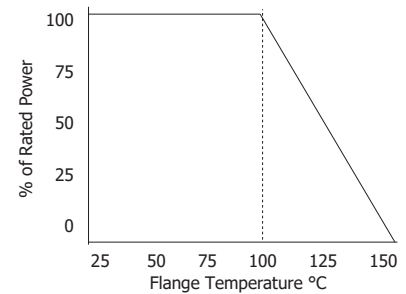

Dimensions in inches [mm]
Tolerance is ± 0.010 [0.254]
unless otherwise stated

¹ Unit can be mounted in either direction
* In a matched, continuous 50Ω system with proper workmanship
** Rating based on ≤100°C constant baseplate temperature

Ordering Information:

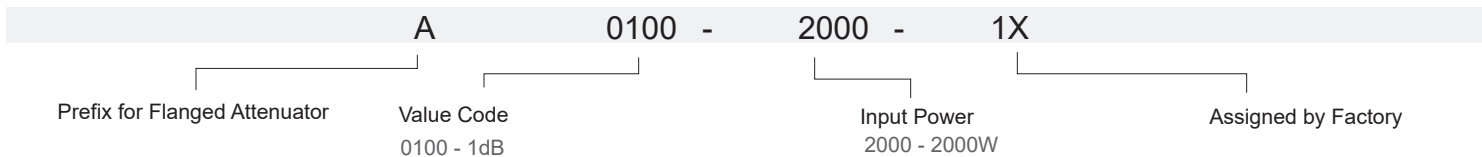

Barry Industries reserves the right to change part number and/or process without notification.

A0100-2000-1X Reliability Data:

| Parameter: | Test Condition: | Results: |
|---|---|--|
| Short Time Overload | Apply 1.1x Rated Power for 5 Seconds. | ≤ 5.0% Resistance Shift |
| Rated Load Life | Apply 1/2 Power Under 40°C ±2°C 90 Minutes on/ 30 Minutes off. Repeat for 100 hours | ≤ 5.0% Resistance Shift |
| Moisture Resistance | MIL-PRF-55342 para.4.8.9 95% RH, 25°C - 65°C | ≤ 5.0% Resistance Shift |
| Resistance to Soldering Heat (Lead) | MIL-STD-202 Method 210 Test Condition "A" | ≤ 5.0% Resistance Shift |
| Resistance to Soldering Heat (Assembly) | MIL-STD-202 Method 210 Test Condition "J" | ≤ 5.0% Resistance Shift |
| Terminal Strength | MIL-STD-202 Method 211 Test Condition "A" 3lbs. Test Condition "B" 5 bends | No Significant Abnormality (Visual) |
| Solderability (Lead only) | MIL-STD-202 Method 208 Test C | >95% Covered |
| High Temperature Storage | 125°C ±2°C for 500 Hours | 1.) ≤ 5.0% Resistance Shift 2.) No Significant Abnormality (Visual) |
| Thermal Shock | -5°C to +150°C 30 Minutes Dwell, 5 Cycles | 1.) ≤ 5.0% Resistance Shift 2.) No Significant Abnormality (Visual) |

Barry Industries reserves the right to change part number and/or process without notification.