

### AA0300-100-9X Features:


- Flange Mount
- RoHS Compliant
- Customer Defined Testing Available
- High Rated Power
- Covered Resistive Element

### AA0300-100-9X Parameters:


|                         |                      |
|-------------------------|----------------------|
| Nominal Attenuation:    | 3dB                  |
| Operating Frequency:    | DC - 2GHz            |
| Attenuation Tolerance:  | -0.3dB +0.7dB        |
| Return Loss (Typical)*: | 20dB or Better       |
| Input Power:            | 100W**               |
| Impedance:              | 50Ω                  |
| Resistor Construction:  | Thick Film on AIN    |
| Flange Construction:    | Silver Plated Copper |
| Lead Construction:      | Silver Plated Copper |
| Operating Temperature:  | -55 to +150°C        |



### AA0300-100-9X Power Derating Curve

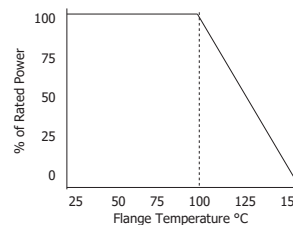

### AA0300-100-9X Dimensions:

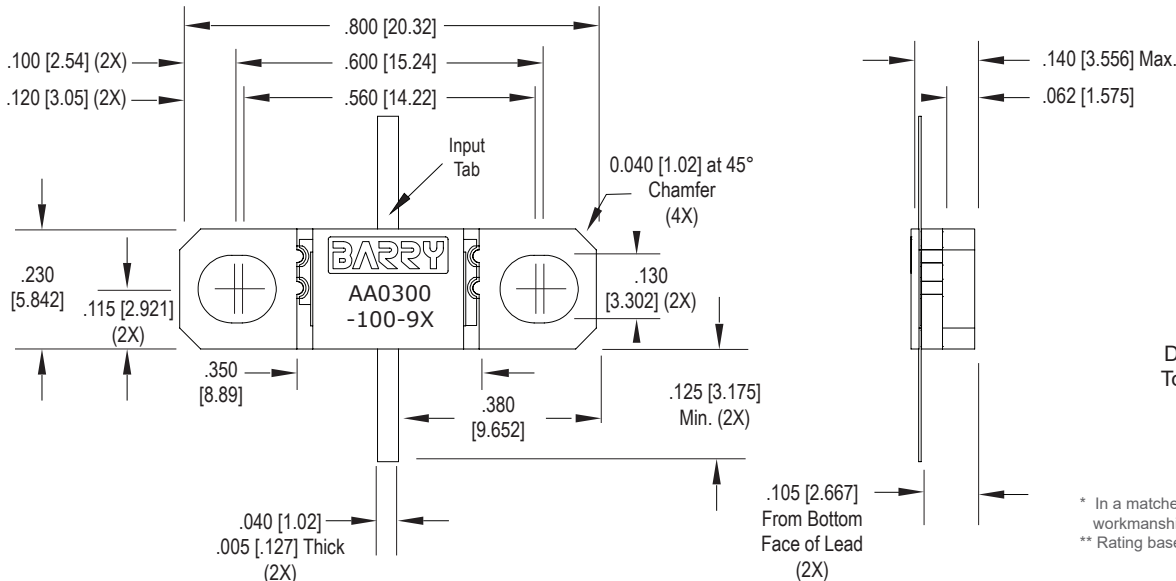

Dimensions in inches [mm]  
Tolerance is ± 0.010 [0.254] unless otherwise stated

\* In a matched, continuous 50Ω system with proper workmanship  
\*\* Rating based on ≤100°C constant baseplate temperature

### Ordering Information:

|  |  |  |  |                          |  |          |  |                           |  |                     |  |           |  |
|--|--|--|--|--------------------------|--|----------|--|---------------------------|--|---------------------|--|-----------|--|
| <b>AA</b>  |  |  |  | <b>0300</b>              |  | <b>-</b> |  | <b>100</b>                |  | <b>-</b>            |  | <b>9X</b> |  |
| Prefix for Flanged Attenuator with AIN Substrate |  |  |  | Value Code<br>0300 - 3dB |  |          |  | Input Power<br>100 - 100W |  | Assigned by Factory |  |           |  |

Barry Industries reserves the right to change part number and/or process without notification.

| ORIG.       | REV.        | No. |
|-------------|-------------|-----|
| SEP 17 2008 | JUL 10 2018 | D   |
| PAGE 1 OF 2 |             |     |

**AA0300-100-9X Reliability Data:**

| Parameter:                              | Test Condition:   | Results:   |
|---|---|--|
| Short Time Overload                     | Apply 1.1x Rated Power for 5 Seconds.   | ≤ 5.0% Resistance Shift  |
| Rated Load Life                         | Apply 1/2 Power Under 40°C ±2°C<br>90 Minutes on/ 30 Minutes off.<br>Repeat for 100 hours | ≤ 5.0% Resistance Shift  |
| Moisture Resistance                     | MIL-PRF-55342 para.4.8.9<br>95% RH, 25°C - 65°C   | ≤ 5.0% Resistance Shift  |
| Resistance to Soldering Heat (Lead)     | MIL-STD-202 Method 210<br>Test Condition "A"  | ≤ 5.0% Resistance Shift  |
| Resistance to Soldering Heat (Assembly) | MIL-STD-202 Method 210<br>Test Condition "J"  | ≤ 5.0% Resistance Shift  |
| Terminal Strength                       | MIL-STD-202 Method 211<br>Test Condition "A" 3lbs.<br>Test Condition "B" 5 bends          | No Significant Abnormality (Visual)                                    |
| Solderability (Lead only)               | MIL-STD-202 Method 208 Test C   | >95% Covered   |
| High Temperature Storage                | 125°C ±2°C for 500 Hours  | 1.) ≤ 5.0% Resistance Shift<br>2.) No Significant Abnormality (Visual) |
| Thermal Shock                           | -5°C to +150°C<br>30 Minutes Dwell, 5 Cycles  | 1.) ≤ 5.0% Resistance Shift<br>2.) No Significant Abnormality (Visual) |

Barry Industries reserves the right to change part number and/or process without notification.

Barry Industries maintains an ISO9001 Certified Quality Management System and is an ITAR Registered company.