


Aluminum Nitride FLANGED ATTENUATOR

Features:


- ◆ Aluminum Nitride Material
- ◆ DC - 5 GHz Performance
- ◆ 100 Watt Input Power
- ◆ Flange Mount

General Description:


The AA0500-100-14X is a flanged 5 dB Aluminum Nitride attenuator. It has an input power of 100 watts, while maintaining a constant flange temperature of 100°C. It offers a frequency range from DC to 5 GHz.

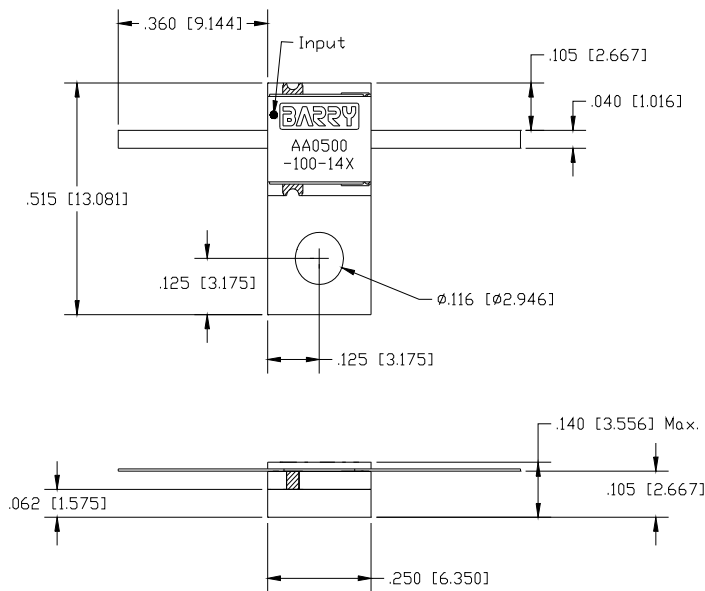

Dimensions in inches [mm]
Tolerance $\pm .010$ [.254]
unless otherwise stated

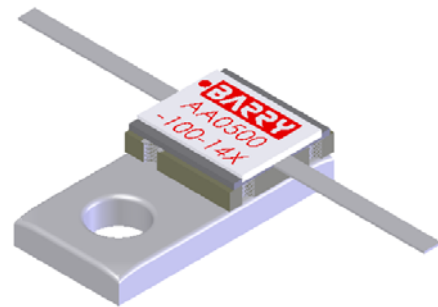

DERATING CURVE:



Parameter	Min.	Typ.	Max.	Units
Frequency Range	DC		5	GHz
Input / Output Return Loss (DC - 4 GHz) (4 - 5 GHz)	19 17			dB
Input Power			100	Watts
Flange Temperature			100	°C
Attenuation Flatness (DC - 4 GHz) (4 - 5 GHz)		+/- 0.5 +/- 1.0		dB

Barry Industries reserves the right to change part number and or process without notification.

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com

Barry is ISO 9001:2000 Certified by



Origination Date	Revision Date	Rev.
01/12/09	01/12/09	-