



WWW.BARRYIND.COM

# TA50R0-150-25X




## ALUMINUM NITRIDE FLANGED TERMINATION

### Features:


- ◆ Aluminum Nitride Material
- ◆ DC - 3.5 GHz Performance
- ◆ 150 Watt Input Power
- ◆ Flange Mount

### General Description:


The TA50R0-150-25X is a flanged, 50 ohm Aluminum Nitride termination. It has an input power of 150 watts, while maintaining a constant flange temperature of 100°C. It offers a frequency range from DC to 3.5 GHz.

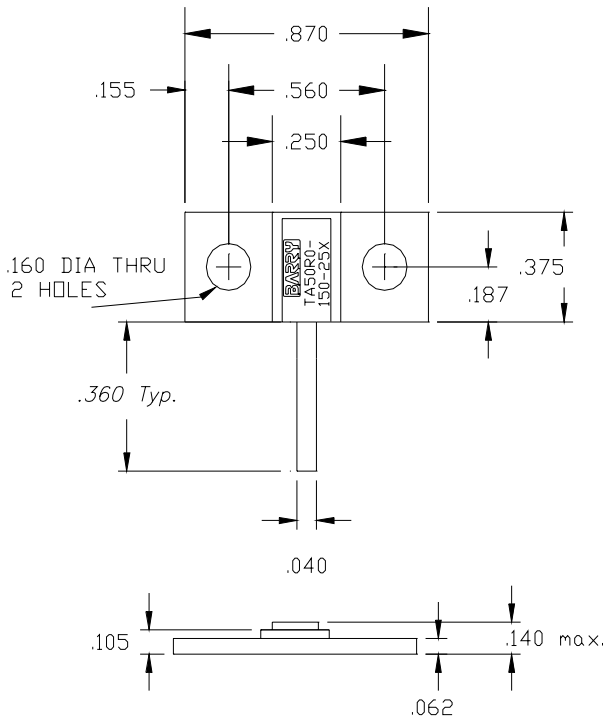

Dimensions in inches  
Tolerance  $\pm .010$   
unless otherwise stated

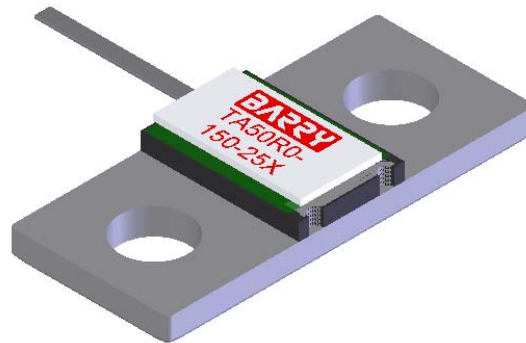

DERATING CURVE:

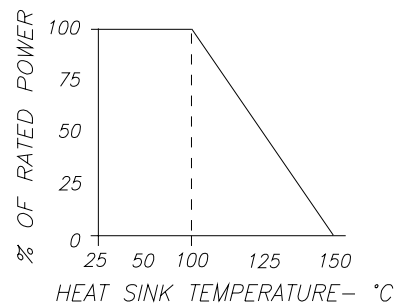

Parameter	Min.	Typ.	Max.	Units
Frequency Range	DC		3.5	GHz
Input Return Loss	20			dB
DC - 2 GHz	26			
Input Power			150	Watts
Resistance	47.5	50	52.5	Ohms
Flange Temperature			100	°C

Barry Industries reserves the right to change part number and or process without notification.

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com

Barry is ISO 9001:2000 Certified by



Origination Date	Revision Date	Rev.
02/02/05	04/28/08	B