



WWW.BARRYIND.COM

D04Z-50R0J99-01C36-X



BeO




LEADED TERMINATION

Features:

- ◆ BeO Material
- ◆ DC-2 GHz Performance
- ◆ 30 Watt Input Power
- ◆ Solder Mountable


General Description:

The D04Z-50R0J99-01C36-X is a leaded 50 ohm, BeO termination. It has an input power of 30 watts max, while maintaining a constant mounting surface temperature of 100°C. It offers a frequency range from DC to 2 GHz.

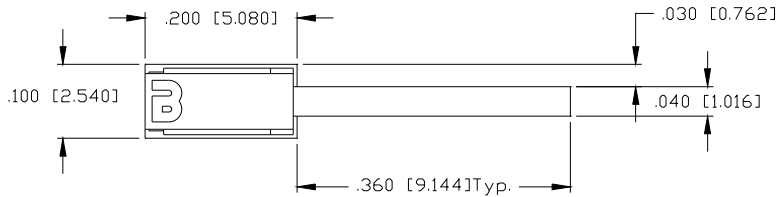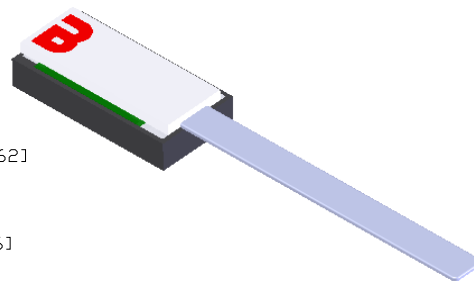

Dimensions in inches [mm]
Tolerance $\pm .010$ [.254]
unless otherwise stated

DERATING CURVE:

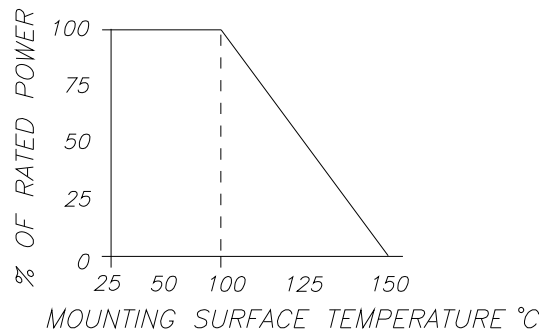

| Parameter | Min. | Typ. | Max. | Units |
|------------------------------|------|------|------|-------|
| Frequency Range | DC | | 2 | GHz |
| Input Return Loss | 20 | | | dB |
| Input Power | | | 30 | Watts |
| Resistance | 47.5 | 50 | 52.5 | Ohms |
| Mounting Surface Temperature | | | 100 | °C |

Barry Industries reserves the right to change part number and or process without notification.

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com
Barry Industries maintains an ISO 9001 Certified Quality Management System

| Origination Date | Revision Date | Rev. |
|------------------|---------------|------|
| 02/12/08 | 06/02/10 | A |