



WWW.BARRYIND.COM

D06Z-50R0J83-02C36-X



BeO FREE™




LEADED TERMINATION

Features:

- ◆ BeO FREE™ Material
- ◆ DC - 2 GHz Performance
- ◆ 30 Watt Input Power
- ◆ Solder Mountable


General Description:

The D06Z-50R0J83-02C36-X is a leaded 50 ohm, BeO FREE™ termination. It has an input power of 30 watts max, while maintaining a constant mounting surface temperature of 100°C. It offers a frequency range from DC to 2 GHz.

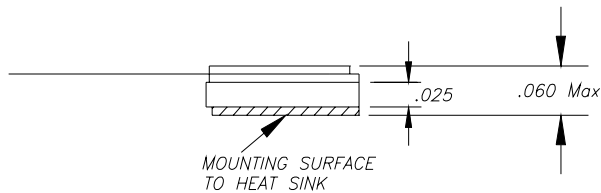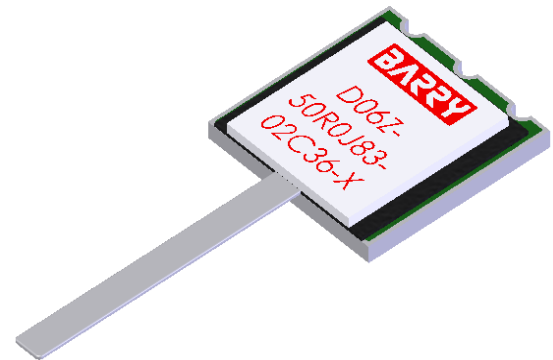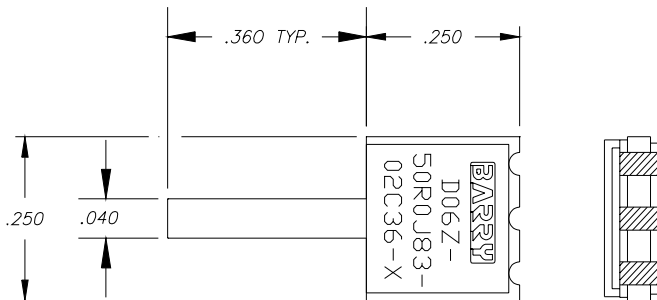

Dimensions in inches
Tolerance ± .010 unless
otherwise stated

DERATING CURVE:

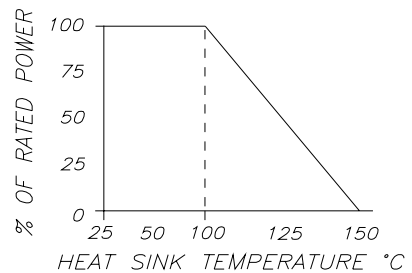

Parameter	Min.	typ.	Max.	Units
Frequency Range	DC		2	GHz
Return Loss	17			dB
Input Power			30	Watts
Resistance	47.5	50	52.5	Ohms
Heat Sink Temperature			100	°C

Barry Industries reserves the right to change part number and or process without notification.

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com

Barry Industries maintains an ISO 9001 Certified Quality Management System

Origination Date	Revision Date	Rev.
02/19/08	02/19/08	-