



WWW.BARRYIND.COM

D06Z-50R0J83-03C36-X






BeO FREE™ LEADED TERMINATION

Features:


- ◆ BeO FREE™ Material
- ◆ DC - 4 GHz Performance
- ◆ 60 Watt Input Power
- ◆ Solder Mountable

General Description:

The B06Z-50R0J83-03C36-X is a leaded 50 ohm, BeO FREE™ leaded termination. It has an input power of 60 watts max, while maintaining a constant mounting surface temperature of 100°C. It offers a frequency range from DC to 4 GHz.

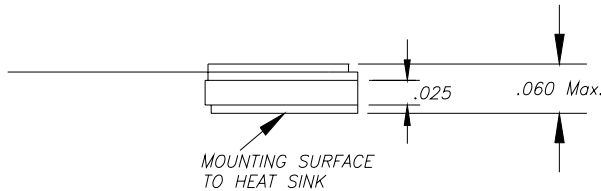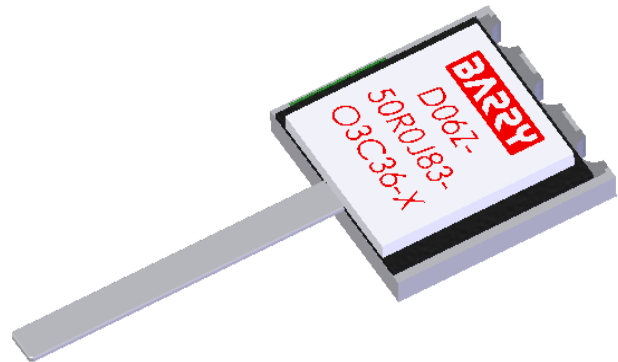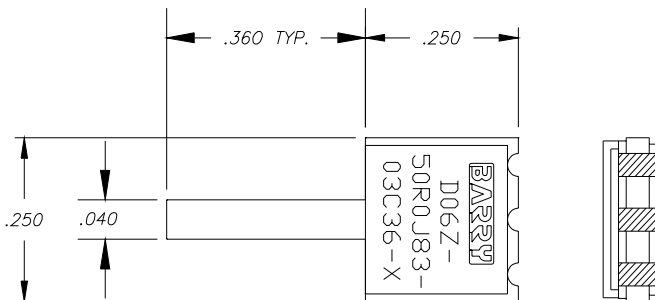

Dimensions in inches
Tolerance ± .010 unless otherwise stated

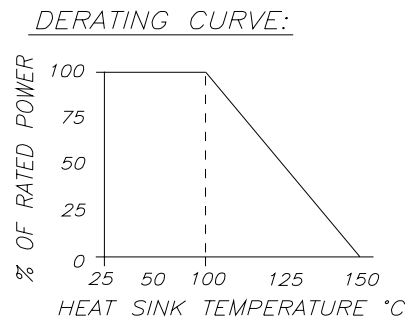

Parameter	Min.	Typ.	Max.	Units
Frequency Range	DC		4.0	GHz
Input Return Loss	25			dB
Input Power			60	Watts
Resistance	47.5	50	52.5	Ohms
Mounting Surface Temperature			100	°C

Barry Industries reserves the right to change part number and or process without notification.

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com

Barry Industries maintains an ISO 9001 Certified Quality Management System

Origination Date	Revision Date	Rev.
02/18/08	02/19/08	-