



WWW.BARRYIND.COM

ATC2525AS-1000JN-99




BeO 10dB SURFACE MOUNT ATTENUATOR

Features:


- ◆ BeO
- ◆ DC to 2 GHz
- ◆ 30 Watt Power Rating
- ◆ Solder mountable
- ◆ AS - Tin Lead over Platinum Palladium Gold

General Description:

The ATC2525AS-1000JN-99 is a 10 dB BeO solder mountable chip attenuator with a frequency range up to 2 GHz. It has a power rating of 30 Watts while maintaining a heat sink temperature of 100°C.

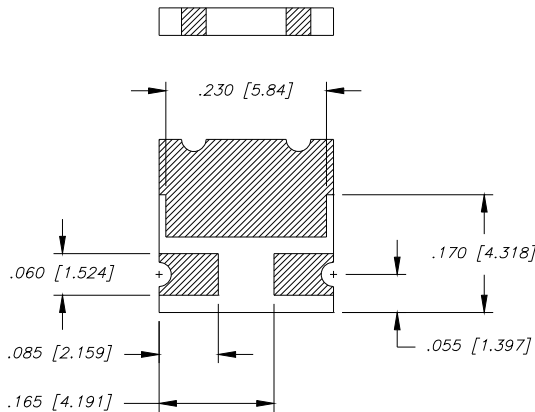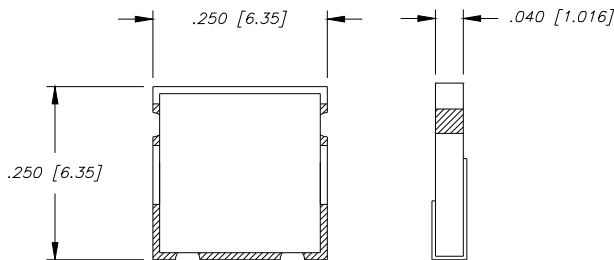

DERATING CURVE:



Parameter	Min.	Typ.	Max	Units
Frequency Range	DC		2	GHz
Attenuation	9	10	11	dB
Input Return Loss	20			dB
Output Return Loss	20			dB
Input Power			30	Watts
Mounting Surface Temperature			100 150 (0% Power)	°C

Barry Industries reserves the right to change part number and or process without notification.

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com

Barry Industries maintains an ISO 9001 Certified Quality Management System

Origination Date	Revision Date	Rev.
08/09/06	01/21/13	A