



WWW.BARRYIND.COM

AVC2525CT-1000JN-2T-03



Aluminum Nitride

10 dB


CHIP ATTENUATOR

Features:



- ◆ Aluminum Nitride Material
- ◆ DC - 4 GHz Performance
- ◆ 40 Watt Input Power
- ◆ Solder Mountable

General Description:

The AVC2525CT-1000JN-2T-03 is an Aluminum Nitride 10 dB chip attenuator. It has an input power of 40 watts, while maintaining a constant mounting surface temperature of 100°C. It offers a frequency range from DC to 4 GHz.

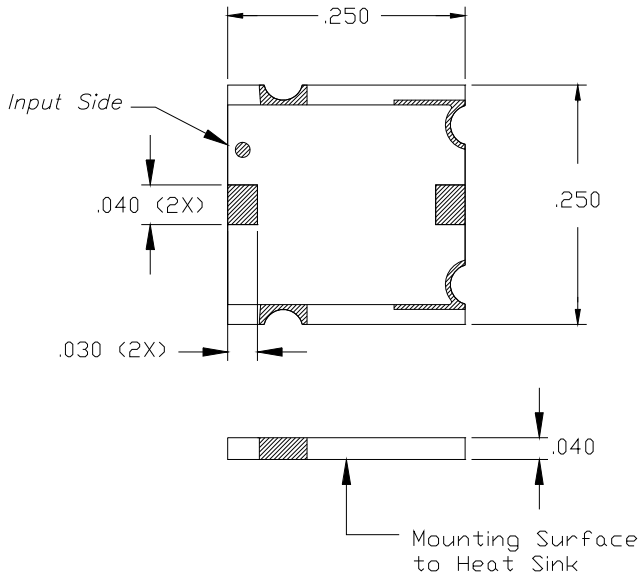

Dimensions in inches
Tolerance $\pm .010$
unless otherwise stated

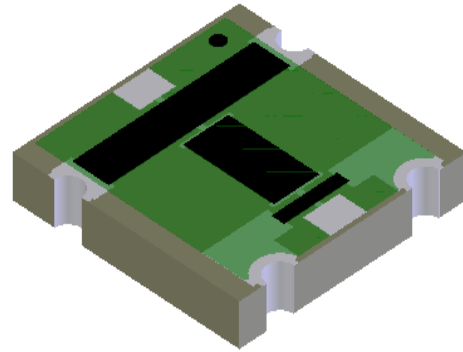

Parameter	Min.	Typ.	Max	Units	
Frequency Range	DC		4	GHz	
Attenuation	DC - 2.2 GHz	9.75	10	10.25	dB
Attenuation	2.2 - 4 GHz	9.50	10	10.50	
Input Return Loss	DC - 2.2 GHz	22			dB
Input Return Loss	2.2 - 4 GHz	15			
Output Return Loss	DC - 2.2 GHz	22			dB
Output Return Loss	2.2 - 4 GHz	15			
Input Power			40	Watts	
Mounting Surface Temperature			100	°C	

Barry Industries reserves the right to change part number and or process without notification.

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com

Barry Industries maintains an ISO 9001 Certified Quality Management System

Origination Date	Revision Date	Rev.
09/17/04	05/20/09	D