


H04Z-0500J2T-00C36-X Features:


- Solderable Leads
- Symmetrical Design¹
- RoHS Compliant
- Customer Defined Testing Available

H04Z-0500J2T-00C36-X Parameters:


Nominal Attenuation*:	5dB
Operating Frequency:	DC - 4GHz
Attenuation Tolerance:	-0.3dB, +0.5dB (DC - 1GHz) -0.3dB, +1.0dB (>1 - 4GHz)
Return Loss (Typical)**:	17dB or Better (DC - 2.7GHz) 14dB or Better (>2.7 - 4GHz)
Input Power:	10W***
Impedance:	50Ω
Resistor Construction:	Thick Film on AIN
Lead Construction:	Silver Plated Copper
Operating Temperature:	-55 to +150°C

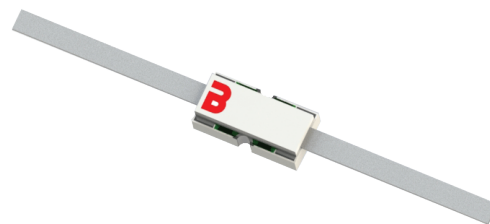

H04Z-0500J2T-00C36-X Power Derating Curve

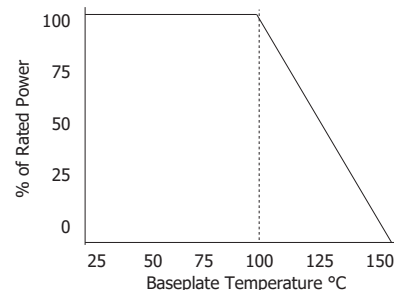

H04Z-0500J2T-00C36-X Dimensions:

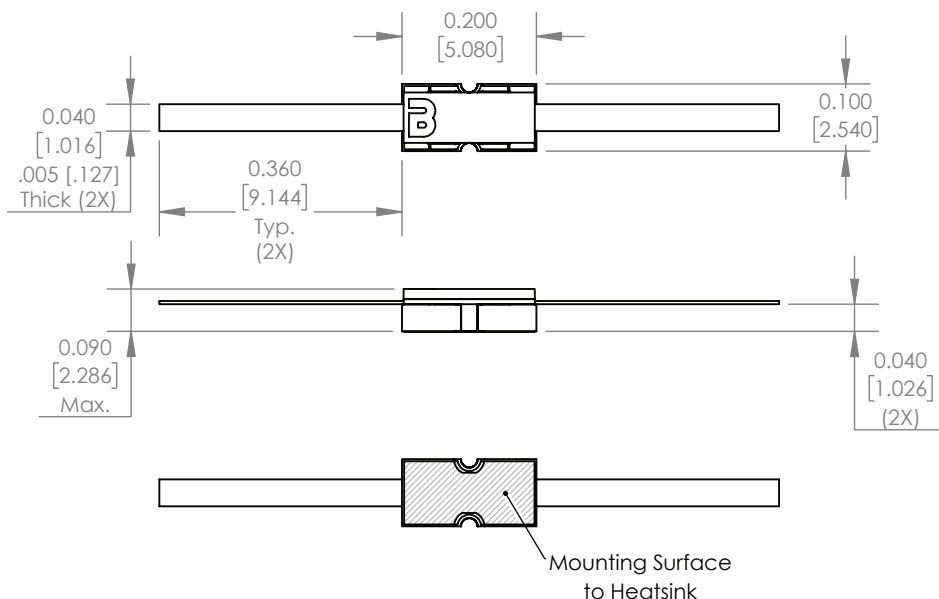

Dimensions in inches [mm]
Tolerance is ± 0.010 [0.254]
unless otherwise stated


¹ Can be mounted in either direction
* Other values and available. Contact factory
** In a matched, continuous 50Ω system with proper workmanship
*** Rating based on ≤100°C constant baseplate temperature

Ordering Information:


H04Z-0500J2T-00C36-X

Barry Industries reserves the right to change part number and/or process without notification.

H04Z-0500J2T-00C36-X Return Loss:

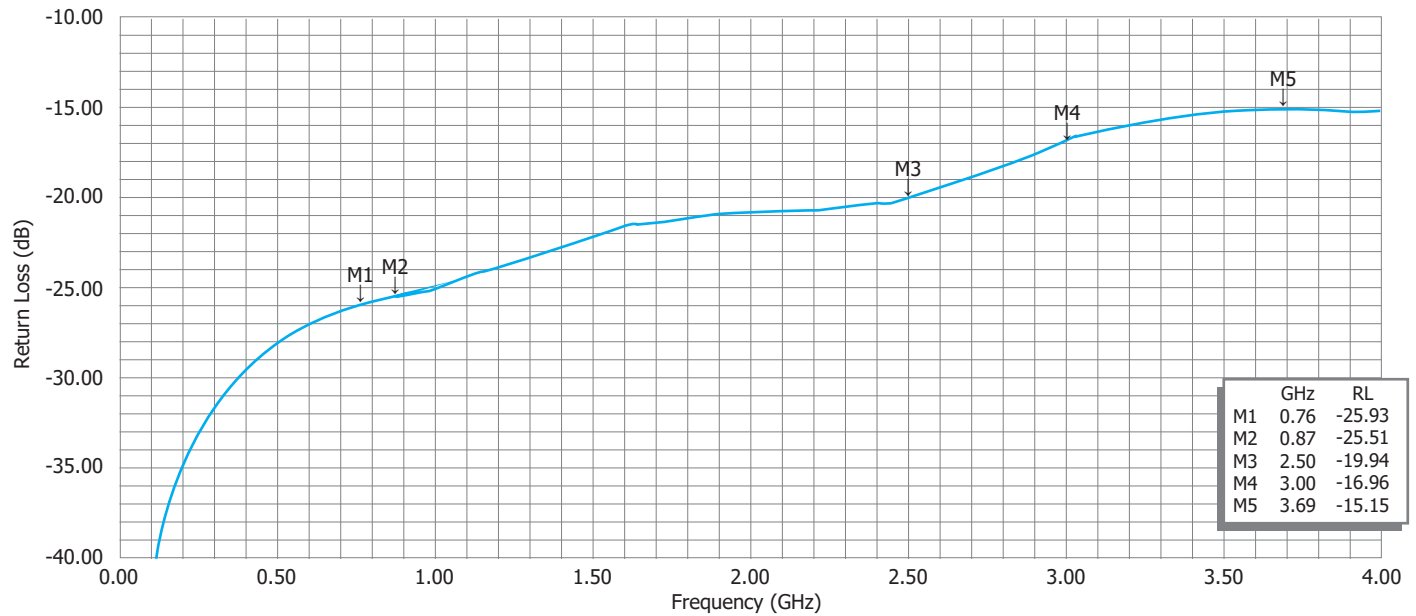

H04Z-0500J2T-00C36-X Attenuation Accuracy:

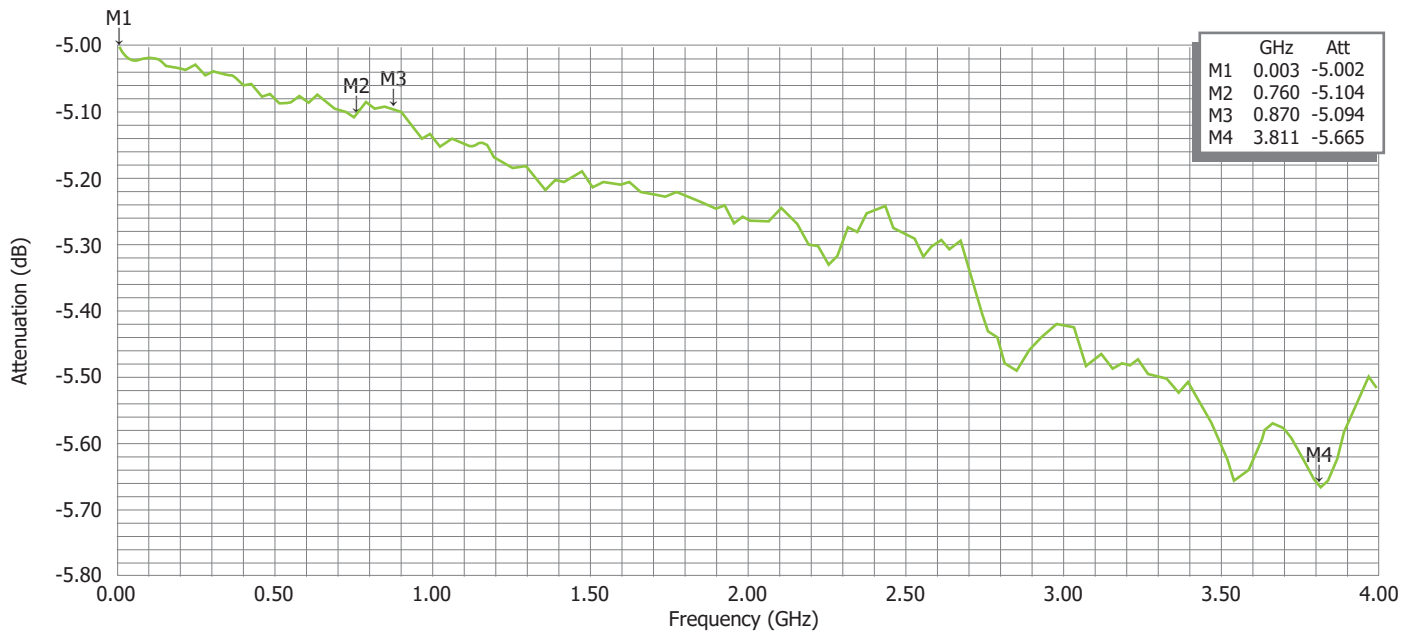

Barry Industries reserves the right to change part number and/or process without notification.

H04Z-0500J2T-00C36-X Reliability Data:

Parameter:	Test Condition:	Results:
Short Time Overload	Apply 1.1x Rated Power for 5 Seconds.	≤ 5.0% Resistance Shift
Rated Load Life	Apply 1/2 Power Under 40°C ±2°C 90 Minutes on/ 30 Minutes off. Repeat for 100 hours	≤ 5.0% Resistance Shift
Moisture Resistance	MIL-PRF-55342 para.4.8.9 95% RH, 25°C - 65°C	≤ 5.0% Resistance Shift
Resistance to Soldering Heat (Lead)	MIL-STD-202 Method 210 Test Condition "A"	≤ 5.0% Resistance Shift
Resistance to Soldering Heat (Assembly)	MIL-STD-202 Method 210 Test Condition "J"	≤ 5.0% Resistance Shift
Terminal Strength	MIL-STD-202 Method 211 Test Condition "A" 3lbs. Test Condition "B" 5 bends	No Significant Abnormality (Visual)
Solderability (Lead only)	MIL-STD-202 Method 208 Test C	>95% Covered
High Temperature Storage	125°C ±2°C for 500 Hours	1.) ≤ 5.0% Resistance Shift 2.) No Significant Abnormality (Visual)
Thermal Shock	-65°C to +150°C 30 Minutes Dwell, 5 Cycles	1.) ≤ 5.0% Resistance Shift 2.) No Significant Abnormality (Visual)

Barry Industries reserves the right to change part number and/or process without notification.