


### T50R0-1000-3X Features:


- Flange Mount
- RoHS Compliant
- Customer Defined Testing Available
- High Rated Power
- $\pm 5\%$  Resistor Tolerance

### T50R0-1000-3X Parameters:


Operating Frequency:	DC - 1.4GHz
Rated Power:	1000W*
Return Loss (Typical)*:	28.5dB or Better (DC - 1GHz) 14dB or Better (>1GHz - 1.4GHz)
Impedance:	50Ω $\pm 5\%$ ***
Resistor Construction:	Thick Film on BeO
Flange Construction:	Silver Plated Copper
Lead Construction:	Silver Plated Copper
Operating Temperature:	-55 to +150°C

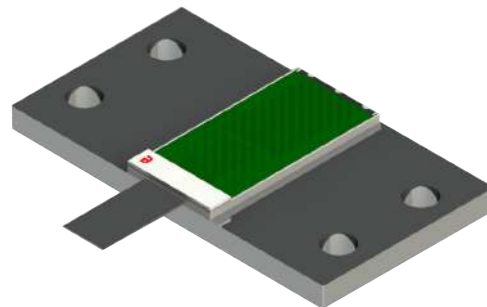

### T50R0-1000-3X Power Derating Curve

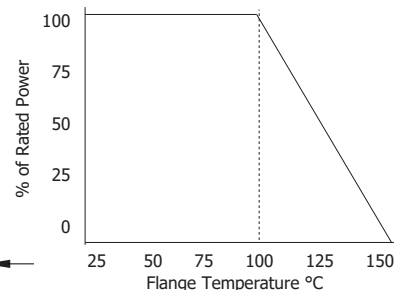


### T50R0-1000-3X Dimensions:

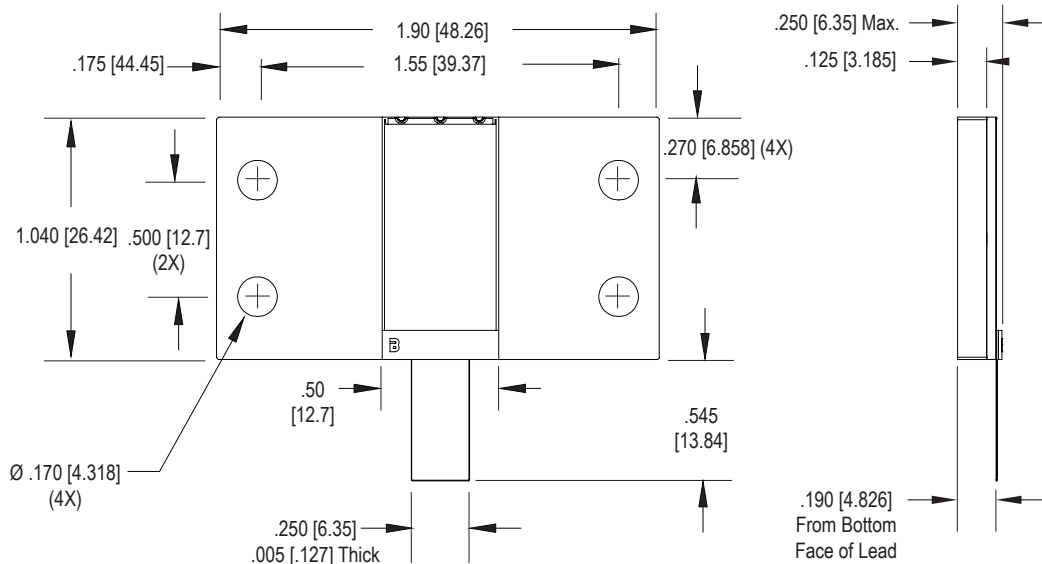

Dimensions in inches [mm]  
Tolerance is  $\pm 0.010$  [0.254]  
unless otherwise stated

\* Rating based on  $\leq 100^\circ\text{C}$  constant flange temperature  
\*\* In a matched, continuous 50Ω system with proper workmanship  
\*\*\* Other values and tolerances available. Contact factory.

### Ordering Information:

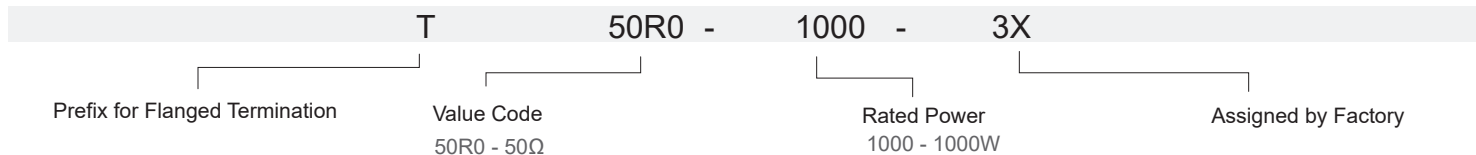

Barry Industries reserves the right to change part number and/or process without notification.

**T50R0-1000-3X Reliability Data:**

Parameter:	Test Condition:	Results:
Short Time Overload	Apply 1.1x Rated Power for 5 Seconds.	≤ 5.0% Resistance Shift
Rated Load Life	Apply 1/2 Power Under 40°C ±2°C 90 Minutes on/ 30 Minutes off. Repeat for 100 hours	≤ 5.0% Resistance Shift
Moisture Resistance	MIL-PRF-55342 para.4.8.9 95% RH, 25°C - 65°C	≤ 5.0% Resistance Shift
Resistance to Soldering Heat (Lead)	MIL-STD-202 Method 210 Test Condition "A"	≤ 5.0% Resistance Shift
Resistance to Soldering Heat (Assembly)	MIL-STD-202 Method 210 Test Condition "J"	≤ 5.0% Resistance Shift
Terminal Strength	MIL-STD-202 Method 211 Test Condition "A" 3lbs. Test Condition "B" 5 bends	No Significant Abnormality (Visual)
Solderability (Lead only)	MIL-STD-202 Method 208 Test C	>95% Covered
High Temperature Storage	125°C ±2°C for 500 Hours	1.) ≤ 5.0% Resistance Shift 2.) No Significant Abnormality (Visual)
Thermal Shock	-5°C to +150°C 30 Minutes Dwell, 5 Cycles	1.) ≤ 5.0% Resistance Shift 2.) No Significant Abnormality (Visual)

Barry Industries reserves the right to change part number and/or process without notification.

Barry Industries maintains an ISO9001 Certified Quality Management System.