




BeO6 dBFLANGED ATTENUATOR

Features:

- ◆ **BeO Material**
- ◆ **DC - 3 GHz Performance**
- ◆ **20 Watt Input Power**
- ◆ **Flange Mount**


General Description:

The A0600-20-3X is a flanged 6 dB, BeO attenuator. It has an input power of 20 watts, while maintaining a constant flange temperature of 100°C. It offers a frequency range from DC to 3 GHz.

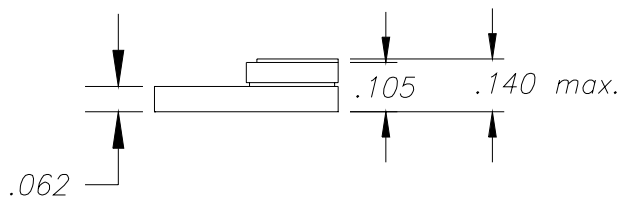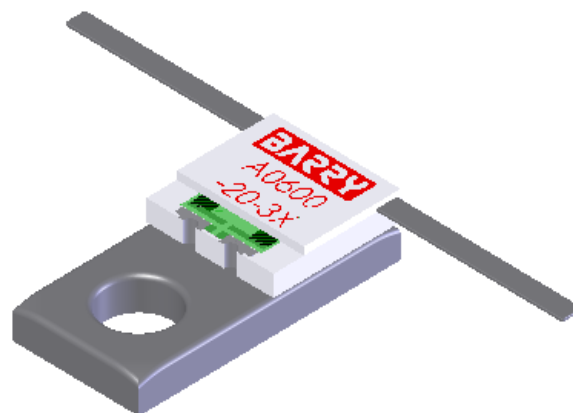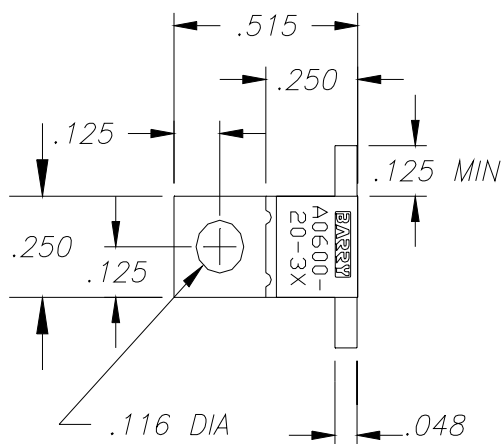

Either terminal can be used for input
Dimensions in inches
Tolerance ± .010
unless otherwise stated

DERATING CURVE:

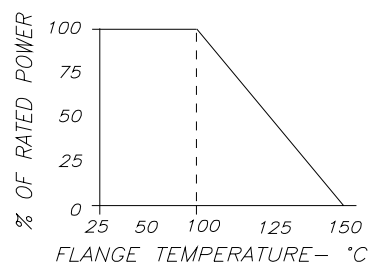

Parameter	Min.	Typ.	Max.	Units
Frequency Range	DC		3	GHz
Input Return Loss	20			dB
Output Return Loss	20			dB
Input Power			20	Watts
Flange Temperature			100	°C
Attenuation	5	6	7	dB

Barry Industries reserves the right to change part number and or process without notification.

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com

Barry Industries maintains an ISO 9001 Certified Quality Management System

Origination Date	Revision Date	Rev.
05/16/08	05/16/08	-