



Aluminum Nitride 25 dB FLANGED ATTENUATOR

Features:


- ◆ AIN Material
- ◆ DC - 2.5 GHz Performance
- ◆ 150 Watt Input Power
- ◆ Flange Mount

General Description:


The AA2500-150-5X is a flanged 25 dB Aluminum Nitride attenuator. It offers an input power of 150 watts max, while maintaining a constant flange temperature of 100°C. It has a frequency range from DC- 2.5 GHz.

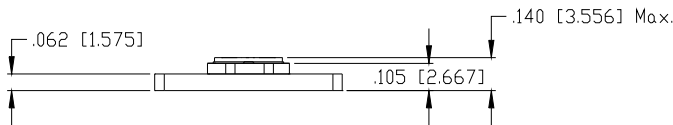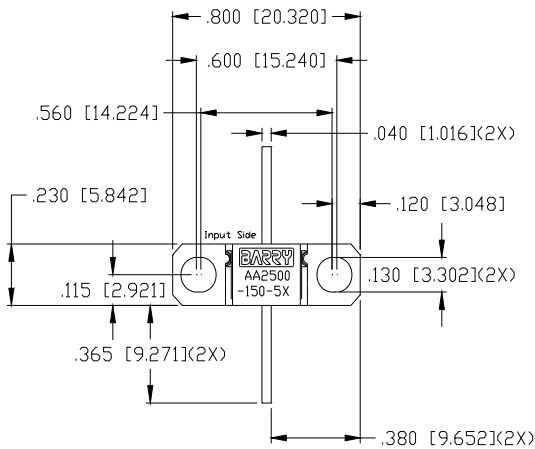

Dimensions in inches [mm]
Tolerance $\pm .010$ [.254]
unless otherwise stated

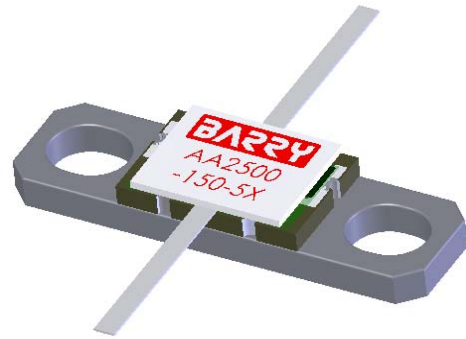

DERATING CURVE:



Parameter	Min.	Typ.	Max.	Units
Frequency Range	DC		2.5	GHz
Attenuation	24	25	26	dB
Input Return Loss	18			dB
Output Return Loss	25			dB
Input Power			150	Watts
Reverse Power (output)			2	Watts
Heat Sink Temperature			100	°C

Barry Industries reserves the right to change part number and or process without notification

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com

Barry Industries maintains an ISO 9001 Certified Quality Management System

Origination Date	Revision Date	Rev.
04/15/10	04/15/10	-