


### A3000-800-1X Features:


- Flange Mount
- RoHS Compliant
- Customer Defined Testing Available
- High Rated Power
- Covered Resistive Element (First and Last Chips)

### A3000-800-1X Parameters:


Nominal Attenuation:	30dB	
Operating Frequency:	DC - 4.5GHz	
Attenuation Tolerance:	±1dB	
Input Return Loss (Typical)*:	20dB or Better	(DC - 2.5GHz)
	17dB or Better	(>2.5 - 4.5GHz)
Output Return Loss (Typical)*:	16dB or Better	(DC - 2.5GHz)
	10dB or Better	(>2.5 - 4.5GHz)
Rated Power:	800W**	
Impedance:	50Ω	
Resistor Construction:	Thick Film on BeO	
Flange Construction:	Silver Plated Copper	
Lead Construction:	Silver Plated Copper	
Operating Temperature:	-55 to +150°C	

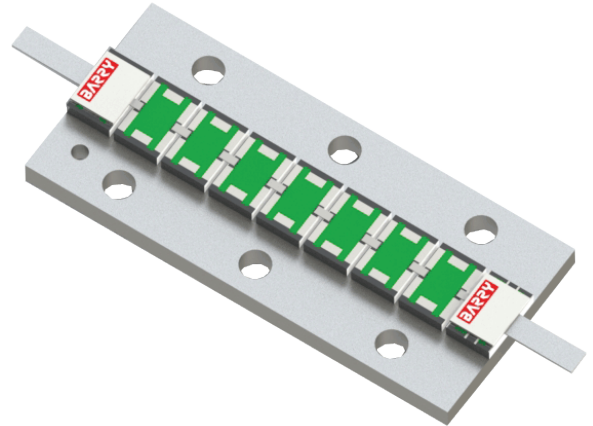

### A3000-800-1X Dimensions:

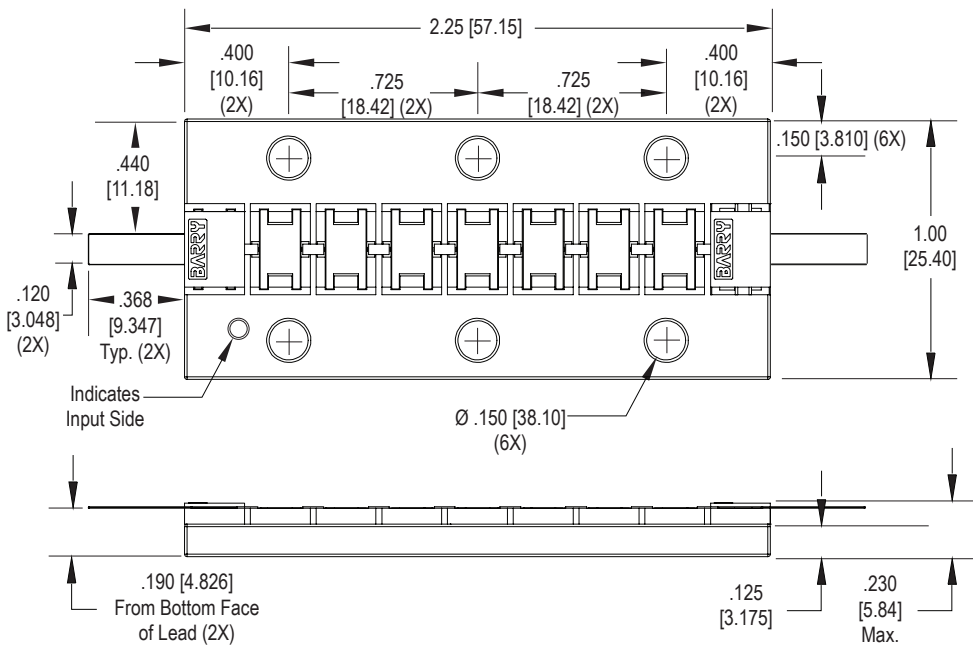

### A3000-800-1X Power Derating Curve

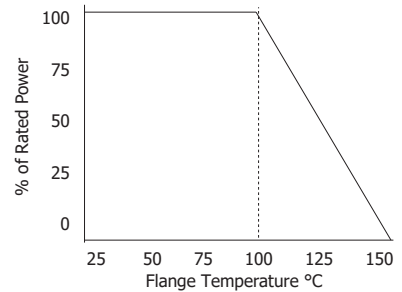

Dimensions in inches [mm]  
Tolerance is ± 0.010 [0.254]  
unless otherwise stated

\* In a matched, continuous 50Ω system with proper workmanship  
\*\* Rating based on ≤100°C constant baseplate temperature

### Ordering Information:

A	3000	-	800	-	1X
Prefix for Flanged Attenuator	Value Code 3000 - 30dB		Rated Power 800 - 800W		Assigned by Factory

Barry Industries reserves the right to change part number and/or process without notification.

**A3000-800-1X Reliability Data:**

Parameter:	Test Condition:	Results:
Short Time Overload	Apply 1.1x Rated Power for 5 Seconds.	≤ 5.0% Resistance Shift
Rated Load Life	Apply 1/2 Power Under 40°C ±2°C 90 Minutes on/ 30 Minutes off. Repeat for 100 hours	≤ 5.0% Resistance Shift
Moisture Resistance	MIL-PRF-55342 para.4.8.9 95% RH, 25°C - 65°C	≤ 5.0% Resistance Shift
Resistance to Soldering Heat (Lead)	MIL-STD-202 Method 210 Test Condition "A"	≤ 5.0% Resistance Shift
Resistance to Soldering Heat (Assembly)	MIL-STD-202 Method 210 Test Condition "J"	≤ 5.0% Resistance Shift
Terminal Strength	MIL-STD-202 Method 211 Test Condition "A" 3lbs. Test Condition "B" 5 bends	No Significant Abnormality (Visual)
Solderability (Lead only)	MIL-STD-202 Method 208 Test C	>95% Covered
High Temperature Storage	125°C ±2°C for 500 Hours	1.) ≤ 5.0% Resistance Shift 2.) No Significant Abnormality (Visual)
Thermal Shock	-5°C to +150°C 30 Minutes Dwell, 5 Cycles	1.) ≤ 5.0% Resistance Shift 2.) No Significant Abnormality (Visual)

Barry Industries reserves the right to change part number and/or process without notification.