



WWW.BARRYIND.COM

H08Z-3000J2T-02C36-X






Aluminum Nitride 30 dB LEADED ATTENUATOR

Features:

- ◆ Aluminum Nitride Material
- ◆ DC - 2 GHz Performance
- ◆ 250 Watt Input Power


General Description:

The H08Z-3000J2T-02C36-X is a 30 dB leaded Aluminum Nitride attenuator. It has an input power rating of 250 watts, while maintaining a constant flange temperature of 100°C. It offers a frequency range from DC to 2 GHz.

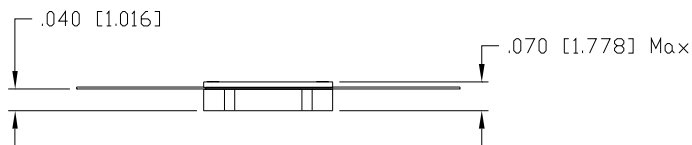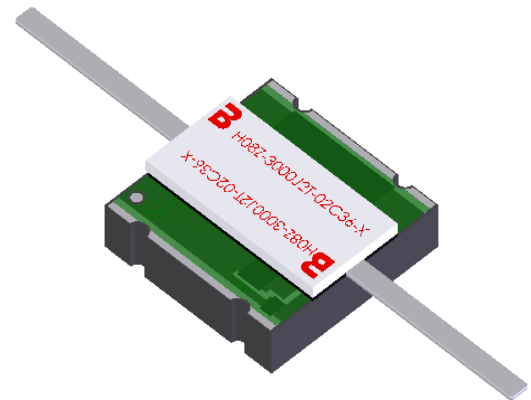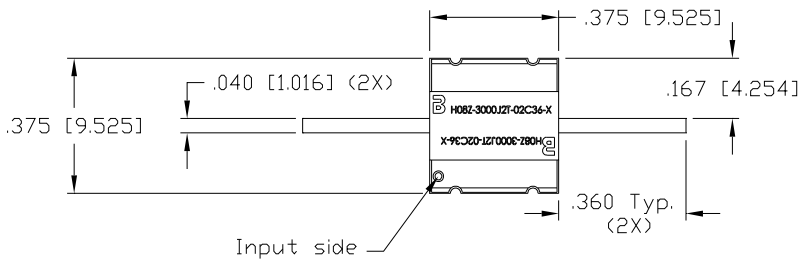

Dimensions in inches [mm]
Tolerance $\pm .010$ [.254]
unless otherwise stated

DERATING CURVE:



Parameter	Min.	Typ.	Max.	Units
Frequency Range	DC		2	GHz
Input Power			250	Watts
Input Return Loss	14			dB
Output Return Loss	17.5			dB
Flange Temperature			100	°C
Attenuation	28.8	30	31.2	dB

Barry Industries reserves the right to change part number and or process without notification.

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com

Barry Industries maintains an ISO 9001 Certified Quality Management System

Origination Date	Revision Date	Rev.
01/04/10	01/04/10	-