



WWW.BARRYIND.COM

T50R0-10-1X



BeO


FLANGED TERMINATION

Features:


- ◆ BeO Material
- ◆ DC - 4 GHz Performance
- ◆ 10 Watt Input Power
- ◆ Flange Mount

General Description:


The T50R0-10-1X is a flanged 50 ohm BeO termination. It has an input power of 10 watts while maintaining a constant flange temperature of 100°C. It offers a frequency range from DC to 4 GHz.

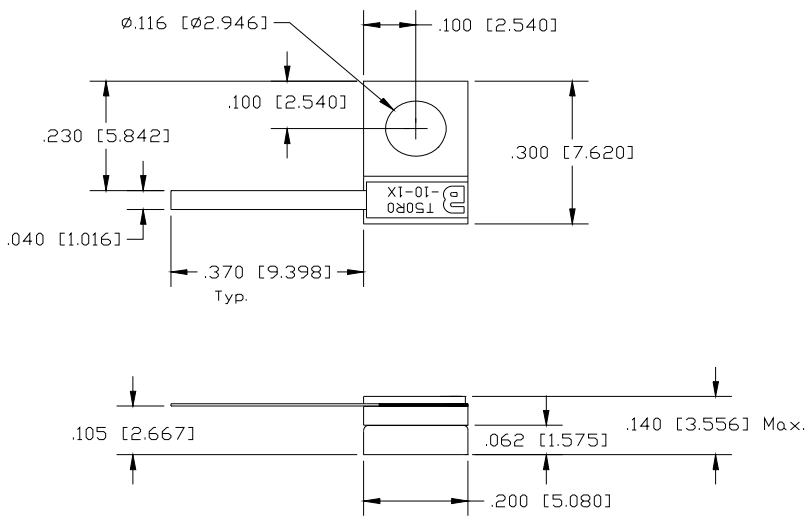

Dimensions in inches [mm]
Tolerance $\pm .010$ [$.254$]
unless otherwise stated

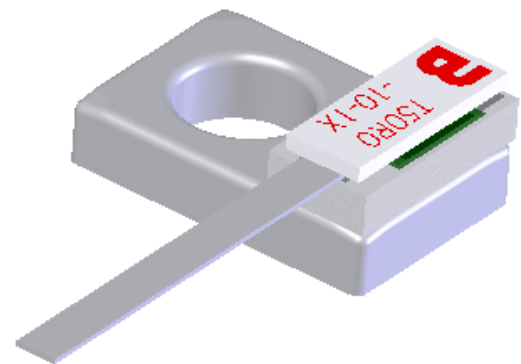

DERATING CURVE:

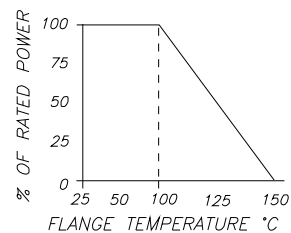

Parameter	Min.	Typ.	Max.	Units
Frequency Range	DC		4	GHz
Input Return Loss (DC -2 GHz) (2- 4 GHz)	18 14			dB
Input Power			10	Watts
Resistance	47.5	50.0	52.5	Ohms
Flange Temperature			100	°C

Barry Industries reserves the right to change part number and or process without notification.

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com

Barry Industries maintains an ISO 9001 Certified Quality Management System

Origination Date	Revision Date	Rev.
01/28/08	02/18/09	A